

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 1 TWN. 15_N RNG. 4_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 4-23-09
Party Chief: Wilcoxon
Crew: Greene / Finney
Type of Marker: RR Spike set
Method of Establishment: County: 4-23-09
IN S.P.C. E Zone, NAD 83
Name: 15040106
N: 502 732.432 (m)
E: 69 192.487 6 (m)

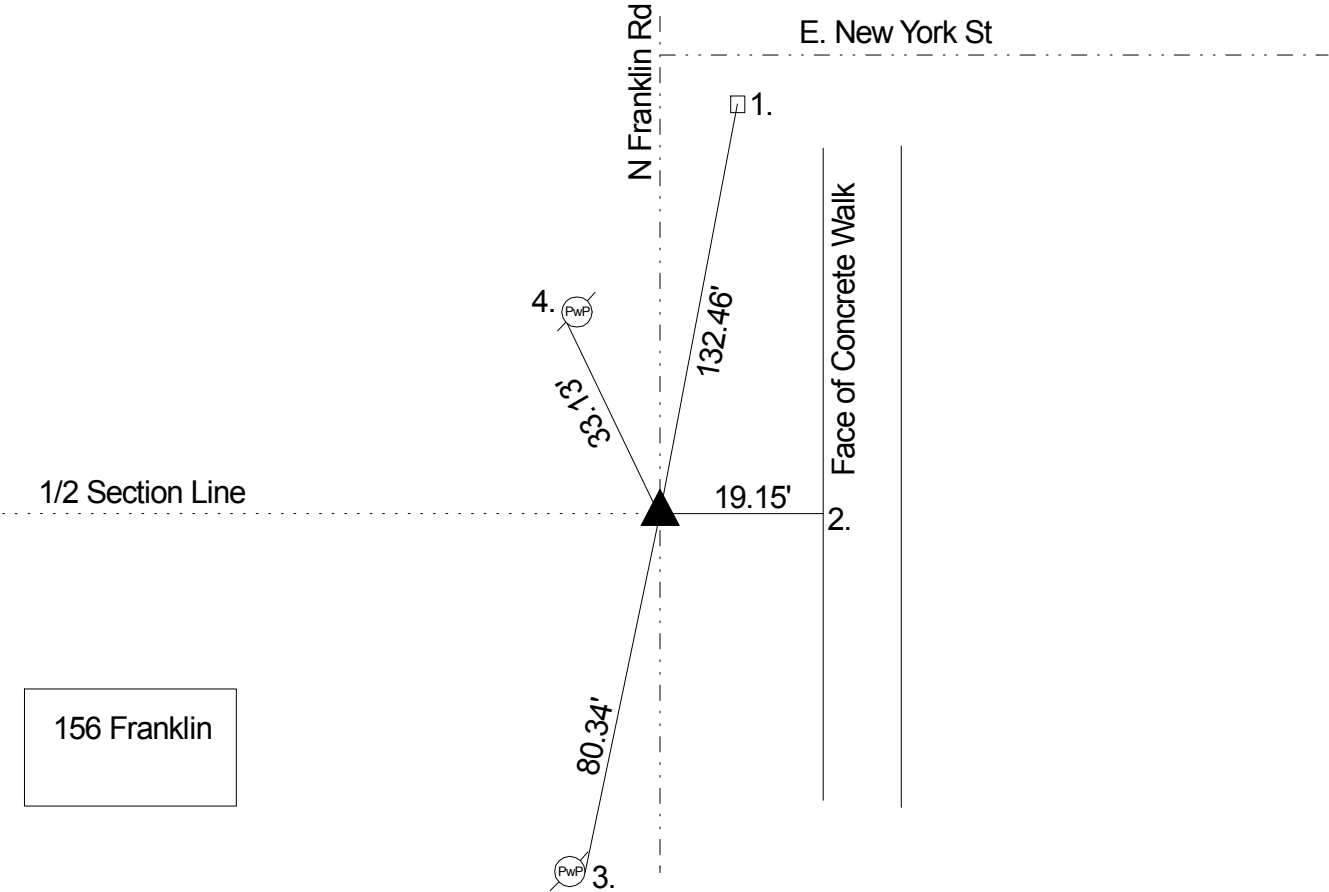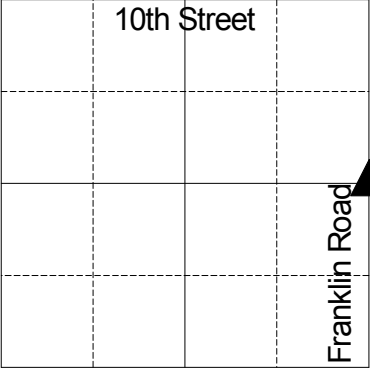

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 20" beech bearing south 9 links; and a 9" dogwood bearing N 24 W 13 links. (M. C. Atlas p. 10) A survey by D. B. Hasbrook on March 25,1850 indicates a set rock with the following witnesses: 36" white oak bearing S 50 E 21 links. (Warren legal Book p. 17) MCS measured from 10th & Franklin (NE Cor 1-15-4) 31.14 south to east corner per legal survey distance. MCS measured N quarter corner of the NE quarter corner legal survey distance down to section line. Ran a line from center of section through quarter quarter corner to east line of 1-15-4 and missed legal survey distance from 10th & Franklin by 0.5'. MCS excavated this location on 4/23/09 and no monuments were found. A r. r. spike was set in position of the corner by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	132.46'	Cut 'x' top of subdivision monument
2.	19.15'	Face of concrete sidewalk
3.	80.34'	Mag nail E PwP #17-549 4" up
4.	33.13'	Mag nail SW PwP #2-519 4" up

--